





12-Pin *multifast*® Receptacles, Front Mount, M23 Thread

- Female Receptacles
- For use with Junction Box Home Run Cables
- IEC IP 67 Protection



Housing Style	Part Number	Lead Specs.	Application	Pinout
 1 CKF  2 CKFL	CKF 12-7-*	UL Nickel Plated Brass 7x18 AWG 105° C 300 V 8 A	4-port, 1 Signal per port	1. BN 3. BU 4. WH 6. GN 7. YE 8. GY 12. GN/YE
	CKF 12-9-*	UL Nickel Plated Brass 9x18 AWG 105° C 300 V 8 A	6-port, 1 Signal per port	1. BN 3. BU 4. WH 6. GN 7. YE 8. GY 9. PK 10. RD 12. GN/YE
	CKF 12-11-*	UL Nickel Plated Brass 11x18 AWG 105° C 300 V 8 A	8-port, 1 Signal per port	1. BN 3. BU 4. WH 5. GN 6. YE 7. GY 8. PK 9. RD 10. BK 11. VT 12. GN/YE
	CKF 12-12-*	UL Nickel Plated Brass 12x18 AWG 105° C 300 V 8 A	8-port, 1 Signal per port	1. BN 2. OG 3. BU 4. WH 5. GN 6. YE 7. GY 8. PK 9. RD 10. BK 11. VT 12. GN/YE
	CKF 12-12-*/S817	UL Nickel Plated Brass 12x18 AWG 105° C 300 V 8 A	8-port, 1 Signal per port Jacketed Cable	1. BN 2. BU 3. WH 4. GN/YE 5. OG 6. YE 7. GY 8. PK 9. RD 10. BN/WH 11. BU/WH 12. GN/WH




See page H47 for dimensional drawings.

* Length in meters. Standard lead length is 1 meter. Consult factory for other lengths.

"CKFL .." indicates long mounting threads; "CKFLV .." indicates 316 stainless steel housing with long threads.
PVC jacketed cable, add "/S717" to the end of the part number.


multifast® Receptacles

1

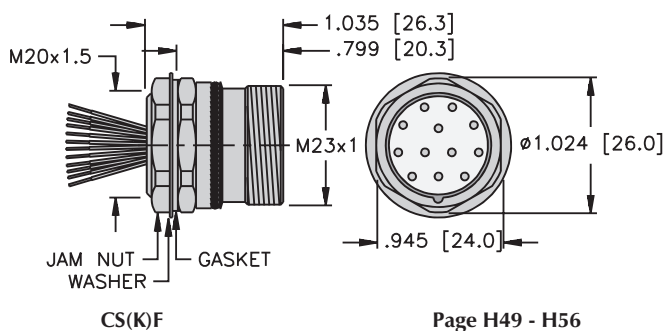

Page H49 - H56


2


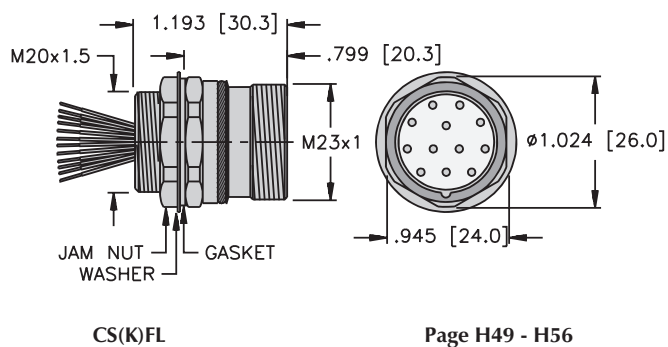



Page H49 - H56

19-Pin *multifast*® Receptacles, Front Mount, M23 Thread

- Female Receptacles
- For use with Junction Box Home Run Cables
- IEC IP 67 Protection



Housing Style	Part Number	Lead Specs.	Application	Pinout
 CKF  CKFL	CKF 19-11-*	UL Nickel Plated Brass 3x18, 8x22 AWG 105° C 150 V 9 A (pins 6, 12,19), 2 A (all others)	4-port, 2 Signals per port	3. GY 4. RD/BU 5. GN 6. BU 7. GY/PK 8. WH/GN 12. GN/YE 14. BN/GN 15. WH 16. YE 19. BN
	CKF 19-15-*	UL Nickel Plated Brass 3x18, 12x22 AWG 105° C 150 V 9 A (pins 6, 12,19), 2 A (all others)	6-port, 2 Signals per port	2. RD 3. GY 4. RD/BU 5. GN 6. BU 7. GY/PK 8. WH/GN 9. WH/YE 12. GN/YE 13. YE/BN 14. BN/GN 15. WH 16. YE 17. PK 19. BN
	CKF 19-19-*	UL Nickel Plated Brass 3x18, 16x22 AWG 105° C 150 V 9 A (pins 6, 12,19), 2 A (all others)	8-port, 2 Signals per port	1. VT 2. RD 3. GY 4. RD/BU 5. GN 6. BU 7. GY/PK 8. WH/GN 9. WH/YE 10. WH/GY 11. BK 12. GN/YE 13. YE/BN 14. BN/GN 15. WH 16. YE 17. PK 18. GY/BN 19. BN



See page H47 for dimensional drawings.


* Length in meters. Standard lead length is 1 meter. Consult factory for other lengths.

"CKFL .." indicates long mounting threads; "CKFLV .." indicates 316 stainless steel housing with long threads.

To specify PVC jacketed cable, add "/S717" to the end of the part number.


multifast® Receptacles

1

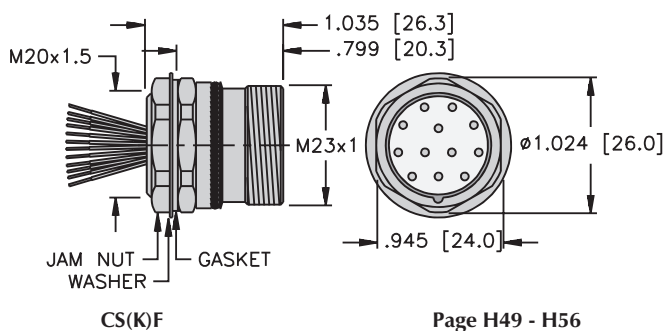

Page H49 - H56

2



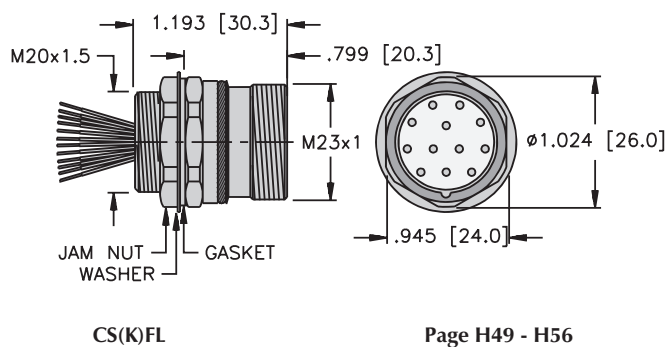


Page H49 - H56

26 and 28-Pin *multifast*® Receptacles, Front Mount, M27 Thread

- Female Receptacles
- For use with Junction Box Home Run Cables
- IEC IP 65 Protection




Housing Style	Part Number	Lead Specs.	Application	Pinout	
	DKF 26-25-*	AWM PVC Yellow 25x22 AWG 105°C 8.0 mm OD 150 V, 8.0 A	25-wire applications	1. BN 14. WH 2. WH/GY 15. BU 3. BU/GY 16. BK/GY 4. BN/GY 17. BN/OG 5. BK/YE 18. WH/OG 6. WH/YE 19. BK/OG 7. BU/YE 20. BK/GN 8. BN/YE 21. WH/GN 9. BK/RD 22. BU/GN 10. WH/RD 23. BN/GN 11. BU/RD 24. BU/OG 12. BN/RD 25. GN/YE 13. BK 26. N/C	
	DKF 28-27-*	AWM PVC Yellow 27x22 AWG 105°C 8.0 mm OD 60 V, 3.0 A	27-wire application	1. BN 15. BU 2. WH/GY 16. BK/GY 3. BU/GY 17. BN/OG 4. BN/GY 18. WH/OG 5. BK/YE 19. BK/OG 6. WH/YE 20. BK/GN 7. BU/YE 21. WH/GN 8. BN/YE 22. BU/GN 9. BK/RD 23. BN/GN 10. WH/RD 24. BU/OG 11. BU/RD 25. GN/YE 12. BN/RD 26. GY 13. BK 27. OG 14. WH 28. N/C	

See page H48 for dimensional drawings.


* Length in meters. Standard lead length is 1 meter. Consult factory for other lengths.

To specify PVC jacketed cable, add "/S717" to the end of the part number.

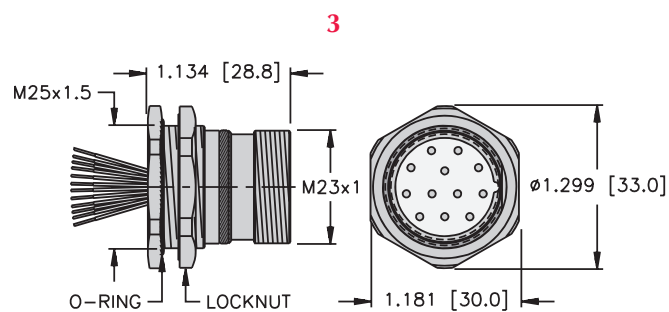

CS(K)FD

Page H57 - H64

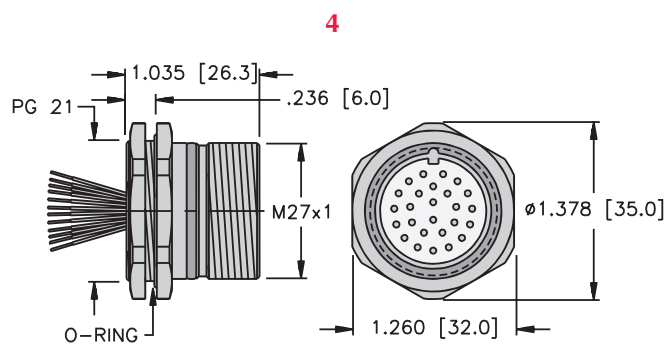

DKF

Page H65 - H66