

2 - 4 Wire 1 3/8" powerfast® Receptacles

- Female Receptacles
- IEC IP 67




Housing Style	Part Number	Lead Specs.	Application	Pinout
GXF ..	GXF 24-0.3M/14.5/NPT	2x14 AWG 90°C 600 V, 18 A	Mates with 2-pin cordsets	
	GXF 22-0.3M/14.5/NPT	2x12 AWG 90°C 600 V, 25 A		
	GXF 20-0.3M/14.5/NPT	2x10 AWG 90°C 600 V, 30 A		
	GXF 34-0.3M/14.5/NPT	3x14 AWG 90°C 600 V, 18 A	Mates with 3-pin cordsets	
	GXF 32-0.3M/14.5/NPT	3x12 AWG 90°C 600 V, 25 A		
	GXF 30-0.3M/14.5/NPT	3x10 AWG 90°C 600 V, 30 A		
	GXF 44-0.3M/14.5/NPT	4x14 AWG 90°C 600 V, 15 A	Mates with 4-pin cordsets	
	GXF 42-0.3M/14.5/NPT	4x12 AWG 90°C 600 V, 20 A		
	GXF 40-0.3M/14.5/NPT	4x10 AWG 90°C 600 V, 25 A		

* Length in meters. Standard lead lengths are 1 and 2 meters. Consult factory for other lengths.
Standard housing and coupling nut material is anodized aluminum.

6 - 9 Wire M23 powerfast® Receptacles, M23 Threads

- Female Connectors
- IEC IP 67







Housing Style	Part Number	Lead Specs.	Application	Pinout
CKF ..	CKF 94-9-*	3x14, 6x18 AWG 105°C 150 V, 8 A	9-pin DC Application	1. RD 2. WH 3. WH/BK 4. BU 5. OG 6. BK 7. GN/BK 8. GN 9. RD/BK
	CKF 64-6-*	6x14 AWG 105°C 300 V, 20 A	6-pin DC Application	1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	CKF 74-7-*	7x14 AWG 105°C 300 V, 20 A	7-pin DC Application	1. WH/BK 2. BK 3. WH 4. RD 5. OG 6. BU 7. GN

* Length in meters. Standard lead lengths are 1 and 2 meters. Consult factory for other lengths.
Standard housing material is nickel plated brass.
To specify PVC jacketed cable, add "/S717" to the end of the part number.

2, 3 and 4-Pin M16 powerfast® Receptacles, Front Mount, 1/2-14NPT Threads

- Straight Female Connectors
- IEC IP 67 Protection



Housing Style	Part Number	Lead Specs.	Application	Pinouts
	BKF 22-*/14.5/NPT	2x12 AWG 90°C 600 V, 18 A	Mates with 2-pin Cordsets, Dual Key	1. WH 2. BK 
	BKF 34-*/14.5/NPT	3x14 AWG 90°C 600 V, 15 A	Mates with 3-pin Cordsets	1. WH 2. GN 3. BK 
	BKF 44-*/14.5/NPT	4x14 AWG 90°C 600 V, 15 A	Mates with 4-pin Cordsets	1. WH 2. GN 3. BK 4. RD 

Receptacles

See page J21 for dimensionial drawings.

*Length in meters. Standard lead length is 0.5 meter. Consult factory for other lengths.


Standard housing material is nickel plated brass.

Available with spanner nut as an option (vs. Hex locknut). Add "/S1046" to end of description.

To specify PVC jacketed cable, add "/S717" to the end of part number.

M16 powerfast® Receptacles


1

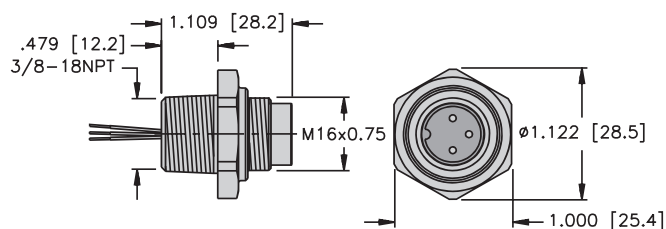

BSF .. /18.375/NPT

Page J23


2

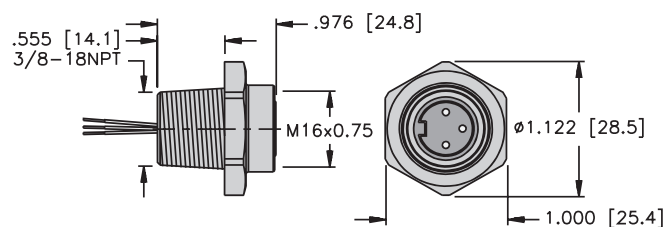

BKF .. 18.375/NPT

Page J24


3

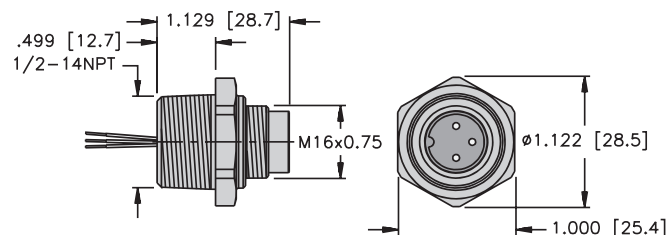

BSF .. /14.5/NPT

Page J25


4

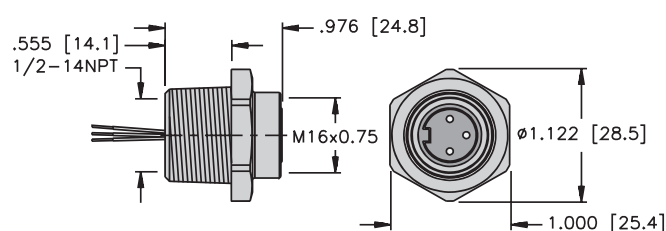

BKF .. /14.5/NPT

Page J26


5

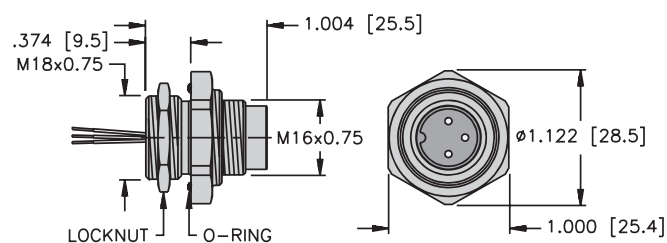

BSF .. /M18

Page J27


6

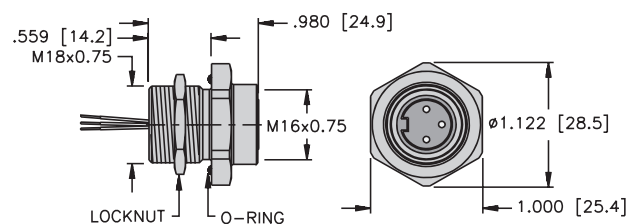

BKF .. /M18

Page J28


7

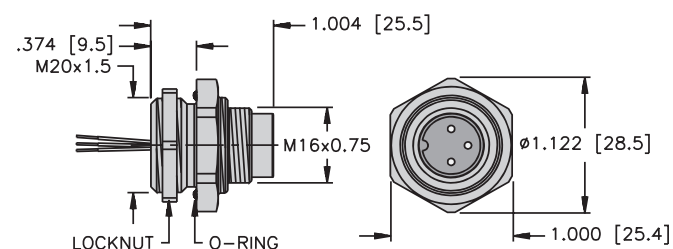

BSF .. /M20

Page J29

8

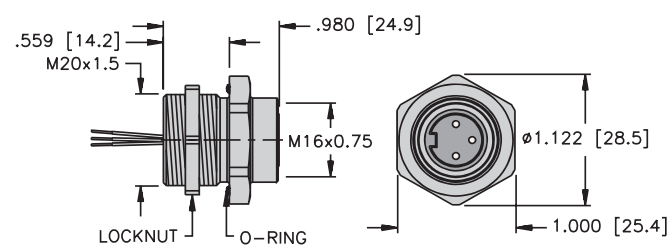

BKF .. /M20

Page J30